

# HydroTap Classic BCS Tap

Product Spec Sheet



## HydroTap Classic Boiling/Chilled/Sparkling (BCS) Tap

Elevate your home hydration with the HydroTap Classic BCS Tap and enjoy instant access to filtered boiling, chilled and sparkling water from the tap.

The HydroTap Classic can be installed over the sink as a secondary tap or over either of our optional Classic Range Font/Drip Trays (Integrated or Raised).

The HydroTap Classic is available in three finishes: Chrome, Brushed Chrome and Matte Black.

## HydroTap Classic BCS Tap - Available Finishes



Chrome



Brushed  
Chrome



Matte  
Black

## Product Order Codes for HydroTap Classic BCS Taps

|                                            |          |
|--------------------------------------------|----------|
| HydroTap Classic BCS Tap in Chrome         | 01034208 |
| HydroTap Classic BCS Tap in Brushed Chrome | 01034209 |
| HydroTap Classic BCS Tap in Matte Black    | 01034210 |

# HydroTap Classic BCS Tap

## Product Spec Sheet



### Installation Requirements


The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.

If using a drip tray (font) accessory, suitable drainage to a trapped waste is required within 3' (0.9m) of the installation. Sufficient space and clearance to install the HydroTap as detailed in the product installation guidelines is required.

Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations.

### HydroTap Classic BCS - Tap Specs

|                                  |                                                                                     |
|----------------------------------|-------------------------------------------------------------------------------------|
| <b>Style:</b>                    | HydroTap Classic Tap (BCS) - includes boiling water safety lock                     |
| <b>Hole Size:</b>                | 1 - 3/8" / 35mm                                                                     |
| <b>Tap Height:</b>               | 8 1/4" (209mm) or 13 13/16" (351mm) when installed with the optional font extension |
| <b>Installation:</b>             | Over sink as a secondary tap or on optional font/drip tray                          |
| <b>Flow Rate:</b>                | Max 1.8 gpm / 6.81 lpm                                                              |
| <b>Sparkling Water Flow Rate</b> | 0.4 gpm / 1.51 lpm                                                                  |
| <b>Product Certifications:</b>   | IAPMO - NSF/ANSI 372, 42, 53, CSA B438.1, ASSE 1023, ASSE 1087; cUL; CEC            |
| <b>ADA Compliant:</b>            | Yes                                                                                 |

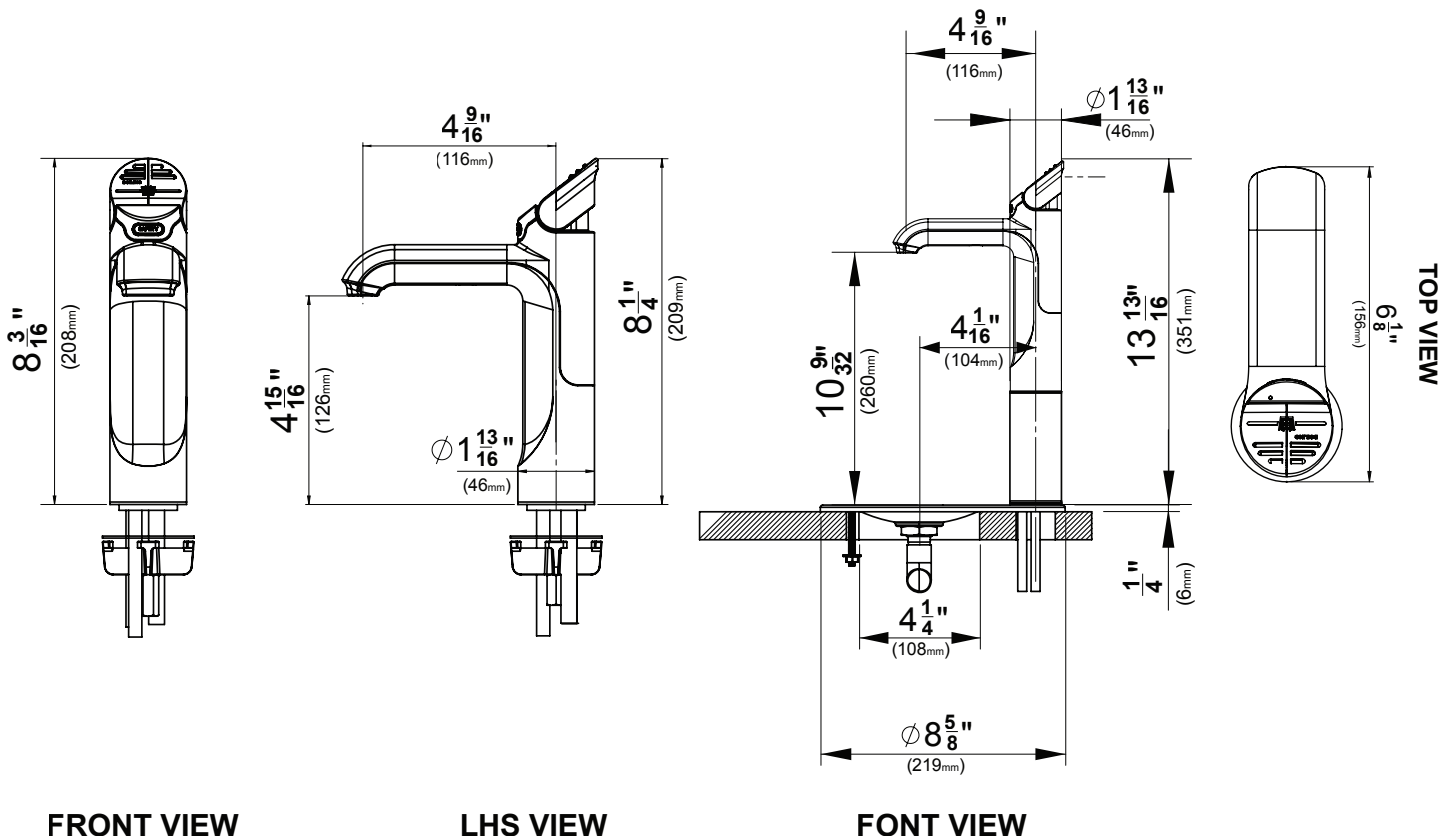

# HydroTap 240V BCS G5 Command Center

## Product Spec Sheet



### HydroTap 240V BCS G5 Command Center

Product Order Code: 01043470

Elevate your drinking water at work by replacing your old, inefficient office water dispenser with a HydroTap BCS 240V system. Employees can enjoy on-demand boiling, chilled, and sparkling water at work.

This command center is ideal for commercial applications with up to 60 users and can be paired with any of our various tap styles.

### HydroTap 240V BCS G5 Command Center - Product Specs

|                                                    |                                                                                                                       |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Product Order Code</b>                          | 01043470                                                                                                              |
| <b>Maximum number of users:</b>                    | Up to 60 people                                                                                                       |
| <b>Water Pressure:</b>                             | Min 37psi – Max 100psi (2.60 - 7.03kg/cm <sup>2</sup> ) with a minimum flow rate of 1 gpm (3.79lpm)                   |
| <b>Water Connection:</b>                           | ½" BSP - isolation valve is required within 3' (0.9m) of the installation                                             |
| <b>Integral Water Values:</b>                      | All HydroTap systems are fitted with a Dual Check Valve and a 50psi (3.52kg/cm <sup>2</sup> ) Pressure Limiting Valve |
| <b>Water Supply Requirements:</b>                  | Potable drinking water supply                                                                                         |
| <b>Optimal Total Dissolved Solids (TDS) Range:</b> | TDS Min 50ppm – Max 150ppm                                                                                            |
| <b>Integral Water Filter:</b>                      | 0.2 micron, 1.5 size - replace every 1,800 gallons / 6,813 liters (~6 months for a large office)                      |
| <b>Power Rating:</b>                               | 220-240V, 50-60Hz, 15 amp power supply with a NEMA 6-15 outlet                                                        |
| <b>Dimensions (WxDxH):</b>                         | 15.5" x 18.2" x 13.1" / 395mm x 464mm x 333mm                                                                         |
| <b>Minimum Air Gap:</b>                            | Minimum of 2" / 50mm clearance on left and right side and 8" / 200mm above                                            |
| <b>Minimum Cabinet Size:</b>                       | 24" wide x 24" deep / 610mm wide x 610mm deep                                                                         |
| <b>Maximum Hose Connection Length</b>              | 3' / 0.9m (tap to command center)                                                                                     |
| <b>Dry Weight:</b>                                 | 90.4lbs / 42kg                                                                                                        |
| <b>Product Approvals:</b>                          | IAPMO - NSF/ANSI 372, 42, 53, CSA B483.1, ASSE 1023, ASSE 1087; cUL; CEC                                              |
| <b>Warranty:</b>                                   | 3 years                                                                                                               |
| <b>Compatible CO<sub>2</sub> Cylinder:</b>         | Zip Water 5lb CO <sub>2</sub> with CGA-320 fitting                                                                    |
| <b>CO<sub>2</sub> Operating Pressure:</b>          | Min 39psi - Max 44psi / Min 2.74 - Max 3.09kg/cm <sup>2</sup>                                                         |

# HydroTap 240V BCS G5 Command Center

## Product Spec Sheet




### Installation Requirements

Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations. You will require suitable 220 -240V 50-60Hz, 15 amp power supply with a NEMA 6-15 electrical outlet within 5' 9" (1.75m) of the product.

The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. The HydroTap is an air-cooled system so discrete cabinetry cut-outs are required for ventilation. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.

If using a drip tray (font) accessory, suitable drainage to a trapped waste is required within 3' (0.9m) of the installation. If you live in an area with hard water (more than 150ppm), we recommend installation of a scale filtration kit or water softener. Sufficient space and clearance to install the HydroTap as detailed in the product installation guidelines is required.

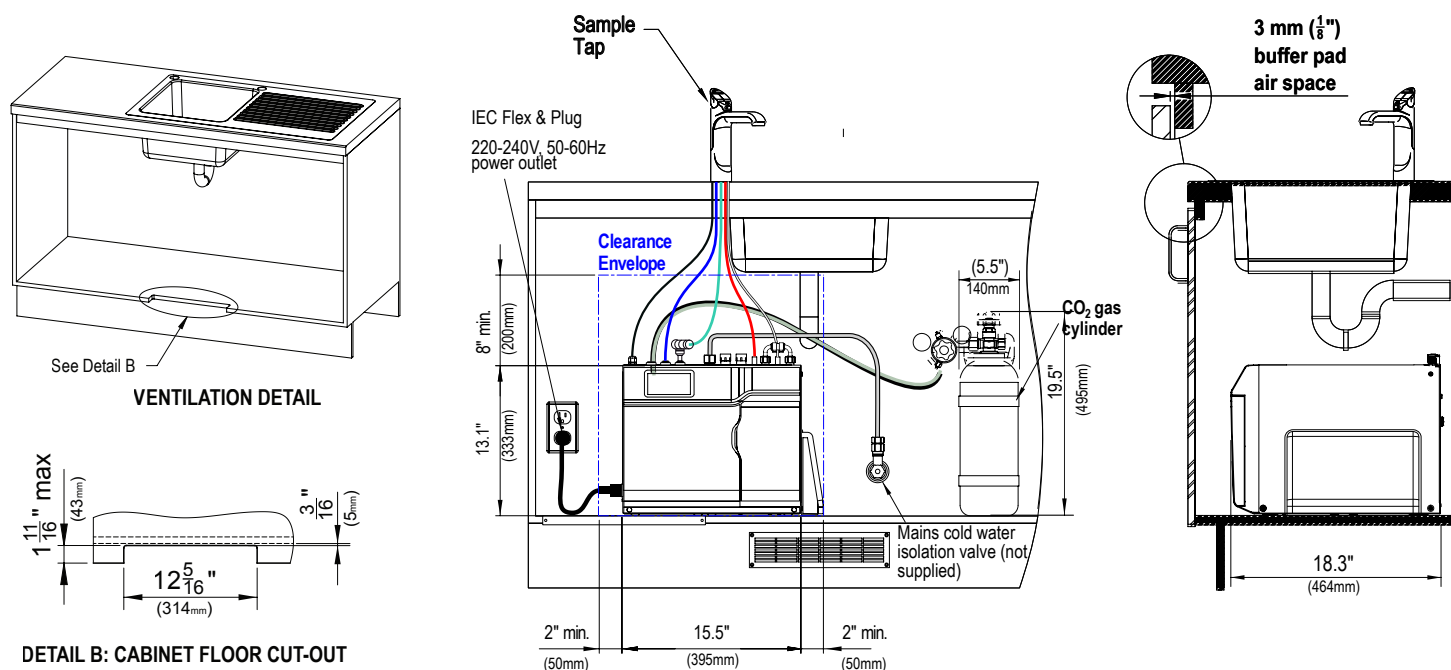

Scan QR code to view installation guide.

Technical Installation assistance over phone or video call can be obtained by calling our customer care line at 1-833-233-2358, Monday through Friday 8am - 5pm Central Time.