

HydroTap 120V CS R290 Kitted Command Center

Product Spec Sheet



HydroTap 120V CS R290 Kitted Command Center with 2 x 1.5lb CO2 and Regulator

Product Order Code: 01048500

The HydroTap by Zip Water is sparkling water on-demand and it's water at its best. That's because the HydroTap 120V CS command center provides users instant access to filtered chilled still and chilled sparkling water.

This command center is kitted with 2 x 1.5lb CO2 and CO2 regulator. It is ideal for residential and small commercial applications and can be paired with any of secondary tap styles.

HydroTap 120V CS R290 Kitted Command Center - Product Specs

Product Order Code	01048500
Water Pressure:	Min 37psi – Max 100psi (2.60 - 7.03kg/cm ²) with a minimum flow rate of 1 gpm (3.79 lpm)
Water Connection:	1/2" MIP by 3/8" COMP - isolation valve is required within 3' (0.9m) of the installation
Integral Water Values:	All HydroTap systems are fitted with a Dual Check Valve and a 50psi (3.52kg/cm ²) Pressure Limiting Valve
Water Supply Requirements:	Potable drinking water supply
Optimal Total Dissolved Solids (TDS) Range:	TDS Min 50ppm – Max 150ppm
Integral Water Filter:	0.2 micron, 1 size - replace every 1,100 gallons / 4,163 liters or 12 months
Power Rating:	110-120V, 50-60Hz, 15 amp power supply with a NEMA 5-15 outlet
Dimensions (WxDxH):	11" x 16.9" x 13.1" / 280mm x 429 x 333mm
Minimum Air Gap:	Minimum of 2" / 50mm clearance on right side and ~8" / 200mm above
Minimum Cabinet Size:	15" wide x 24" deep / 381mm wide x 610mm deep
Maximum Hose Connection Length	3' / 0.9m (tap to command center)
Minimum Distance Needed for Installation	15" / 381mm (interior wall to garbage disposal)
Dry Weight:	66lbs / 30kg
Product Approvals:	IAPMO - NSF/ANSI 372, 42, 53, CSA B483.1, ASSE 1087; cUL; CEC
Warranty:	5-year tank warranty; 2-year limited parts and labor warranty
Compatible CO₂ Cylinder:	Kitted with 2 x 1.5lb CO ₂ and CO ₂ Regulator
CO₂ Operating Pressure:	Min 39psi - Max 44psi / Min 2.74 - Max 3.09kg/cm ²

HydroTap 120V CS R290 Command Center

Product Spec Sheet



Installation Requirements


Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations. You will require suitable 110 -120V 50-60Hz, 15 amp power supply with a NEMA 5-15 electrical outlet within 5' 9" (1.75m) of the product.

The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. The HydroTap is an air-cooled system so discrete cabinetry cut-outs are required for ventilation. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.




If using a drip tray (font) accessory, suitable drainage to a trapped waste is required within 3' (0.9m) of the installation. If you live in an area with hard water (more than 150ppm), we recommend installation of a scale filtration kit or a water softener. Sufficient space and clearance to install the HydroTap as detailed in the product installation guidelines is required.

Ventilation requirements

Option 1. Cupboard with 40mm (~1.6") min overhang

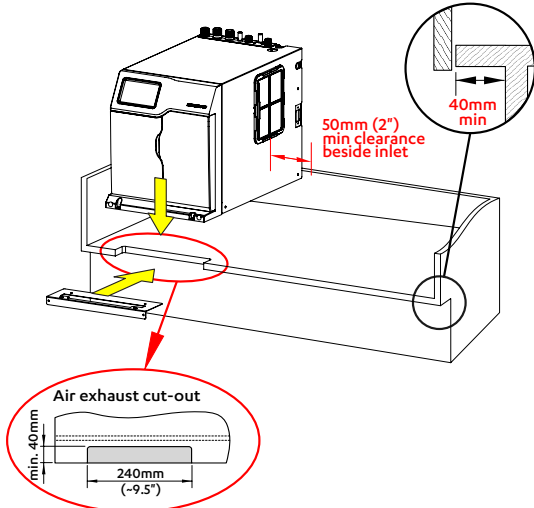

Option 2. Cupboard with less than 40mm (~1.6") overhang

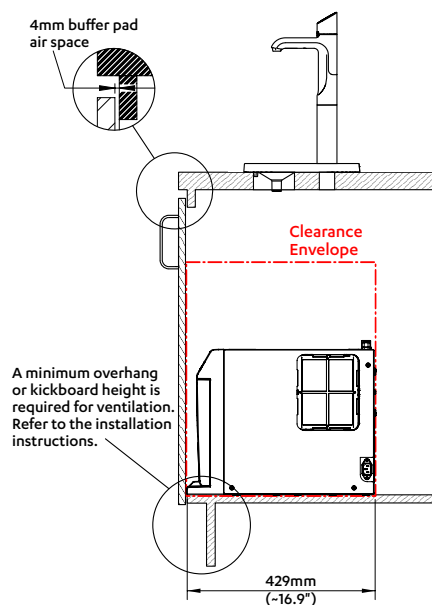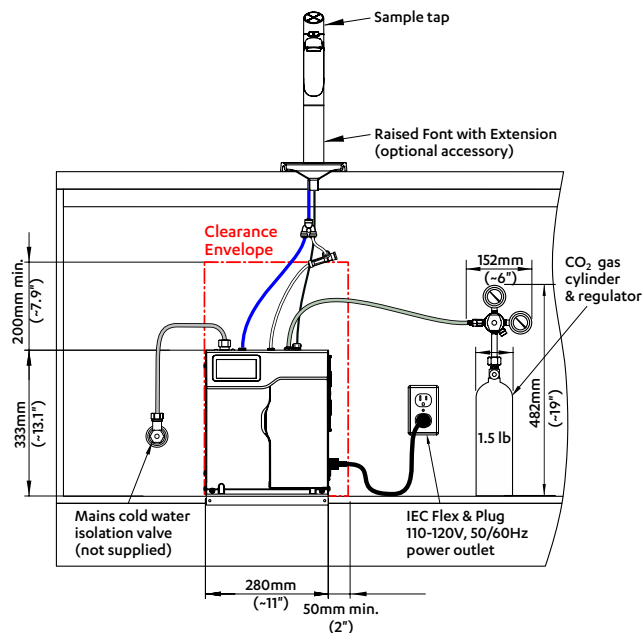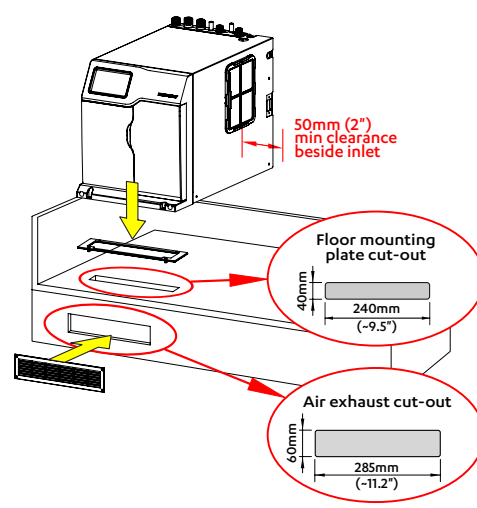

ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.



Scan QR code to view
installation guide.

1.5lb CO₂ Refillable Beverage-Grade Cylinder

Product Spec Sheet



1.5lb CO₂ Cylinder + Regulator - Product Specs

Product Description:	2 x 1.5lb Beverage-Grade Carbon Dioxide Cylinder with Regulator
CO₂ Capacity:	Approximately 400 8oz cups (per canister)
CO₂ Operating Pressure:	Min 39psi - Max 43psi / Min 2.74 - Max 3.02kg/cm ²
Height (without regulator):	Approximately 12" / 305mm
Height (with regulator)	Approximately 19" / 482mm
Cylinder Diameter:	Approximately 3.2" / 81mm
Max Width (with regulator):	Approximately 6" / 152mm
Valve Type:	CGA-320
Storage Temperature:	CO ₂ should be stored out of direct sunlight. Max storage temperature is 120°F (48.8°C)

